

Energy Management Power Analyzer Type WM14 DIN "Advanced version"

CARLO GAVAZZI



- Protection degree (front): IP40
- 2 digital outputs
- 16 freely configurable alarms with OR/AND logic linkable with up to 2 digital outputs
- RS422/485 serial output (MODBUS-RTU), iFIX SCADA compatibility

- Class 1 (kWh), Class 2 (kvarh)
- Accuracy ± 0.5 F.S. (current/voltage)
- Power Analyzer
- Instantaneous variables read-out: 3 DGT
- Energies readout: 8+1 DGT
- System variables: V_{LL} , V_{LN} , A_n , $A_{dmd\ max}$, VA , VA_{dmd} , $VA_{dmd\ max}$, W , W_{dmd} , $W_{dmd\ max}$, var , PF , Hz , ASy
- Single phase variables: V_{LL} , V_{LN} , $V_{LN\ min}$, $V_{LN\ max}$, A , A_{min} , A_{max} , A_{dmd} , VA , W , W_{dmd} , W_{max} , var , PF , PF_{min}
- Harmonic analysis (FFT) up to the 15th harmonic (current and voltage)
- Four quadrant power measurement
- Energy measurements: total and partial kWh and kvarh
- Hour counter (5+2 DGT)
- TRMS meas. of distorted sine waves (voltages/currents)
- Universal power supply: 90 to 260 VAC/DC, 18 to 60 VAC/DC
- Front dimensions: 107,8x90mm (6 DIN modules)
- Voltage asymmetry, phase sequence, phase loss control

Product Description

3-phase advanced power analyzer with integrated programming key-pad. Particularly recommended for the measurement of the main electrical variables.

Housing for DIN-RAIL mounting, with RS485 communication port or pulse and/or alarm outputs.

How to order WM14-DIN AV5 3 H R2 S1 AX

| | |
|--------------|--|
| Model | |
| Range code | |
| System | |
| Power supply | |
| Output 1 | |
| Output 2 | |
| Option | |

Type Selection

| Range codes | System | Output 1 | Output 2 |
|--|---|---|---|
| AV5: 380/660V _{LL} /1/5(6)AAC V _{L-N} : 185 V to 460 V V _{L-L} : 320 V to 800 V AV6: 120/208V _{LL} /1/5(6)AAC V _{L-N} : 45 V to 145 V V _{L-L} : 78 V to 250 V Phase current: 0.03A to 6A Neutral current: 0.09A to 6A | 3 : 1, 2 or 3 phase, balanced/unbalanced load, with or without neutral Power supply L: 18 to 60 VAC/VDC H: 90 to 260 VAC/VDC | R2: 2-relay outputs O2: 2-open collector outputs | XX: None S1: RS485/RS422 port Options AX: advanced functions |

Input specifications

| Rated inputs | System type: 3 - phase 3 (by Shunts) 4 | Phase-neutral voltage | $\pm(0.5\% \text{ FS} + 1 \text{ DGT})$ |
|--|---|----------------------------|---|
| Current | | Active and Apparent power, | 0.25 to 6A: $\pm(1\% \text{ FS} + 1\text{DGT})$; 0.03A to 0.25A: $\pm(1\% \text{ FS} + 5\text{DGT})$ |
| Voltage | | Reactive power | 0.25 to 6A: $\pm(2\% \text{ FS} + 1\text{DGT})$; 0.03A to 0.25A: $\pm(2\% \text{ FS} + 5\text{DGT})$ |
| Accuracy (display, RS485) (@25°C $\pm 5^\circ\text{C}$, R.H. $\leq 60\%$) | with CT=1 and VT=1 AV5: 1150W-VA-var, FS:230VLN, 400VLL; AV6: 285W-VA-var, FS:57VLN, 100VLL | Active energy | Class 1 (start up current: 30mA) |
| Current | 0.25 to 6A: $\pm(0.5\% \text{ FS} + 1\text{DGT})$ | Reactive energy | Class 2 (start up current: 30mA) |
| Neutral current | 0.03A to 0.25A: $\pm(0.5\% \text{ FS} + 7\text{DGT})$ | Frequency | $\pm 0.1\text{Hz}$ (48 to 62Hz) |
| Phase-phase voltage | 0.25 to 6A: $\pm(1.5\% \text{ FS} + 1\text{DGT})$ | Harmonic distortion | $\pm 3\% \text{ F.S.}$ (up to 15 th harmonic) (F.S.: 100%) |
| | 0.09A to 0.25A: $\pm(1.5\% \text{ FS} + 7\text{DGT})$ | | |
| | $\pm(1.5\% \text{ FS} + 1 \text{ DGT})$ | | |

Input specifications (cont.)

| | | | |
|-----------------------------|--|-------------------------------|---|
| Additional errors | | Measurements | |
| Humidity | ≤0.3% FS, 60% to 90% RH | Type | Current, voltage, power, power factor, frequency TRMS measurement of distorted waves. |
| Temperature drift | ≤ 200ppm/°C | Coupling type | Direct |
| Sampling rate | 1600 samples/s @ 50Hz 1900 samples/s @ 60Hz | Crest factor | < 3, max 10A peak |
| Display refresh time | 200ms (FFT off) 500ms (FFT on) | Input impedance | |
| Display | | 380/660V _{L-L} (AV5) | 1.6 MΩ ±5% |
| Type | LED, 9mm | 120/208V _{L-L} (AV6) | 1.6 MΩ ±5% |
| Read-out for instant. var. | 3x3 DGT | Current | ≤ 0.02Ω |
| Read-out for energies | 3+3+3 DGT (Max indication: 999 999 99.9) | Frequency | 48 to 62 Hz |
| Read-out for hour counter | 1+3+3 DGT (Max. indication: 9 999 9.99) | Overload protection | (max values) |
| | | Continuous: voltage/current | AV5: 460V _{LN} , 800V _{LL} /6A AV6: 145V _{LN} , 250V _{LL} /6A |
| | | For 500ms: voltage/current | AV5: 800V _{LN} , 1380V _{LL} /36A AV6: 240V _{LN} , 416V _{LL} /36A |

Output Specifications

| | | | |
|------------------------|---|------------------------------|--|
| Digital outputs | | Insulation | By means of optocouplers, 4000 V _{RMS} output to measuring inputs, 4000 V _{RMS} output to power supply input. |
| Pulse type | Up to 2 | Relay outputs | |
| Number of outputs | Programmable from 0.01 to 500 pulses per kWh/kvarh | Purpose | For alarm outputs or for pulse outputs |
| Type | Pulse duration ≥ 100ms < 120msec (ON), ≥ 100ms (OFF) according to EN62053-31 | Type | Relay, SPST type AC 1-5A @ 250VAC DC 12-5A @ 24VDC AC 15-1.5A @ 250VAC DC 13-1.5A @ 24VDC ≥ 30 x 10 ⁶ operations ≥ 10 ⁵ operations (@ 5A, 250 V, PF 1) 4000 V _{RMS} output to measuring input, 4000 V _{RMS} output to supply input. |
| Alarm type | Up to 2, independent | Mechanical life: | |
| Number of outputs | Up alarm, down alarm, in window alarm, out window alarm. Start-up deactivation function available for all kinds of alarm. All of them connectable on all variables (see the table "List of the variables that can be connected to") | Electrical life: | |
| Alarm modes | From 0 to 100% of the display scale | Insulation | |
| Set-point adjustment | From 0 to full scale | RS422/RS485 | (on request) Multidrop bidirectional (static and dynamic variables) 2 or 4 wires, max. distance 1000m, termination directly on the instrument From 1 to 255, selectable MODBUS/JBUS (RTU) |
| Hysteresis | 0 to 255s | Connections | |
| On-time delay | Selectable; normally de-energized and normally energized | Addresses | |
| Output status | ≤400ms, filters excluded, With FFT off; ≤1s, with FFT on. (with set-point on-time delay: "0s") | Protocol | |
| Min. response time | The digital outputs status can be managed by means of serial communication RS485, if programmed as "rEM". The 2 digital outputs can also work as pulse output and alarm output. | Data (bidirectional) | System and phase variables: see table "List of variables..." |
| Remote control | | Dynamic (reading only) | All the configuration parameters. |
| Note | | Static (reading and writing) | 1 start bit, 8 data bit, no parity, 1 stop bit |
| Static outputs | | Data format | 4800, 9600, 19200, 38400bits/s |
| Purpose | For pulse outputs or for alarm outputs | Baud-rate | By means of optocouplers, 2.5 K V _{RMS} output to measuring input |
| Signal | V _{ON} 1.2 VDC/ max. 100 mA V _{OFF} 30 VDC max. | Insulation | 2.5 K V _{RMS} output to supply input |

Software functions

| | | | |
|--------------------------|--|---------------|--|
| Password | Numeric code of max. 3 digits; 2 protection levels of the programming data | Alarms | "OR" or "AND" or "OR+AND" functions (see "Alarm parameter and logic" page). Freely programmable on up to 16 total alarms (out1+out2). The alarms can be connected to any variables available in the table "List of the variables that can be connected to" |
| 1 st level | Password "0", no protection | Working mode | |
| 2 nd level | Password from 1 to 999, all data are protected | | |
| System selection | | | |
| System 3, unbalanced | 3-phase (3-wire, 4-wire) 3-phase ARON 2-phase (3-wire) | | |
| System 3, balanced | 3-phase (3-wire, 4-wire) 3-phase (4-wire) "1CT+1VT" 3-phase (3-wire) "1CT+2VT" 1-phase (2-wire) | Reset | By means of keypad: The following kinds of reset are available: - all values stored as "dmd max": Admd max, Wdmd max, VAdmd max - all values stored as "max": A ₁ , A ₂ , A ₃ , WL ₁ , WL ₂ , WL ₃ , VL ₁ , VL ₂ , VL ₃ , and as "Min": PF ₁ , PF ₂ , PF ₃ , A ₁ , A ₂ , A ₃ , VL ₁ , VL ₂ , VL ₃ . - Only the kWh and kvarh partial counters - Both the kWh and kvarh total and partial counters - the hour counter. |
| Transformer ratio | | | |
| CT | 1 to 60000 | | |
| VT/PT | | | |
| 1.0 to 6000.0 | | | |
| Filter | | | |
| Operating range | 0 to 100% of the input display scale | | |
| Filtering coefficient | 1 to 32 | | |
| Filter action | Measurements, alarms, serial output (fundamental variables: V, A, W and their derived ones). | | |
| Displaying | Up to 3 variables per page See table "Display pages" | | |

Power Supply Specifications

| | | | |
|---------------|-----------------------------------|-------------------|-----------------------|
| AC/DC voltage | 90 to 260VAC/DC 16 to 60VAC/DC | Power consumption | AC: 6 VA DC: 3.5 W |
|---------------|-----------------------------------|-------------------|-----------------------|

General Specifications

| | | | |
|---------------------------|---|--|---|
| Operating temperature | 0 to +50°C (32 to 122°F) (RH < 90% non condensing) | Immunity | EN61000-6-2 industrial environment. |
| Storage temperature | -30 to +60°C (-22 to 140°F) (RH < 90% non condensing) | Pulse voltage (1.2/50µs) | EN61000-4-5 |
| Overvoltage category | Cat. III (IEC 60664, EN60664) | Safety standards | IEC60664, IEC61010-1 EN60664, EN61010-1 |
| Insulation (for 1 minute) | 4kVAC _{RMS} between measuring inputs and power supply. 4kVAC/DC @ I ≤ 3mA between measuring inputs and RS485. 4kVAC _{RMS} between power supply and RS485. | Approvals | CE, cULus |
| Dielectric strength | 4kVAC _{RMS} (for 1 min) | Connections 5(6) A Max cable cross sect. area | Screw-type 2.5 mm ² |
| EMC | | Housing | Dimensions (WxHxD) Material |
| Emissions | EN61000-6-3 residential environment, commerce and light industry | Mounting | DIN-RAIL |
| | | Protection degree | Front: IP40 (standard) Connections: IP20 |
| | | Weight | Approx. 400 g (pack. incl.) |

Insulation between inputs and outputs

| | Measuring Inputs V | Measuring Inputs A | Relay outputs | Open collector outputs | Communication Port | Power Supply 90-260VAC/DC | Power Supply 18-60VAC/DC |
|------------------------|-----------------------|-----------------------|------------------|---------------------------|-----------------------|------------------------------|-----------------------------|
| Measuring Inputs V | - | - | 4kV | 4kV | 2.5kV | 4kV | 4kV |
| Measuring Inputs A | - | - | 4kV | 4kV | 2.5kV | 4kV | 4kV |
| Relay outputs | 4kV | 4kV | - | - | 4kV | 4kV | 4kV |
| Open col. out- puts | 4kV | 4kV | - | - | 2.5kV | 4kV | 4kV |
| Communication Port | 2.5kV | 2.5kV | - | - | - | 4kV | 4kV |
| 90-260VAC/DC | 4kV | 4kV | 4kV | 4kV | 4kV | - | - |
| 18-60VAC/DC | 4kV | 4kV | 4kV | 4kV | 4kV | - | - |

NOTE: In case of fault of first insulation the current from the measuring inputs to the ground is lower than 2 mA.

List of the variables that can be connected to:

- RS485/RS422 communication port
- Alarm outputs (“max / min” variable, “energies” and “hour counter” excluded)
- Pulse outputs (only “energies”)

| No | Variable | 1-phase system | 2-phase system | 3-ph. 4-wire balanced sys. | 3-ph. 4-wire unbal. sys. | 3 ph. 3-wire bal. sys. | 3 ph. 3-wire unbal. sys. | Notes |
|----|------------|----------------|----------------|----------------------------|--------------------------|------------------------|--------------------------|-------------------|
| 1 | V L1 | x | x | x | x | o | o | # Δ |
| 2 | V L2 | o | x | x | x | o | o | # Δ |
| 3 | V L3 | o | o | x | x | o | o | # Δ |
| 4 | V L-N sys | o | x | x | x | o | o | Sys = system |
| 5 | V L1-2 | o | x | x | x | x | x | |
| 6 | V L2-3 | o | x | x | x | x | x | |
| 7 | V L3-1 | o | o | x | x | x | x | |
| 8 | V L-L sys | o | x | x | x | x | x | Sys = system |
| 9 | A L1 | x | x | x | x | x | x | # Δ |
| 10 | A L2 | o | x | x | x | x | x | # Δ |
| 11 | A L3 | o | o | x | x | x | x | # Δ |
| 12 | An | o | x | x | x | x | x | |
| 13 | W L1 | x | x | x | x | o | o | ◆ |
| 14 | W L2 | o | x | x | x | o | o | ◆ |
| 16 | W L3 | o | o | x | x | o | o | ◆ |
| 17 | W sys | o | x | x | x | x | x | Sys = system |
| 18 | var L1 | x | x | x | x | o | o | |
| 19 | var L2 | o | x | x | x | o | o | |
| 20 | var L3 | o | o | x | x | o | o | |
| 21 | var sys | o | x | x | x | x | x | Sys = system |
| 22 | VA L1 | x | x | x | x | o | o | |
| 23 | VA L2 | o | x | x | x | o | o | |
| 24 | VA L3 | o | o | x | x | o | o | |
| 25 | VA sys | o | x | x | x | x | x | Sys = system |
| 26 | PF L1 | x | x | x | x | o | o | Ⓟ |
| 27 | PF L2 | o | x | x | x | o | o | Ⓟ |
| 28 | PF L3 | o | o | x | x | o | o | Ⓟ |
| 29 | PF sys | o | x | x | x | x | x | Sys = system |
| 30 | Hz | x | x | x | x | x | x | |
| 31 | Phase seq. | o | o | x | x | x | x | |
| 32 | ASY L-N | o | x | x | x | x | x | |
| 33 | ASY L-L | o | x | x | x | x | x | |
| 34 | Phase loss | o | x | x | x | x | x | |
| 35 | VA sys dmd | x | x | x | x | x | x | Sys = system ◆ ○ |
| 36 | W sys dmd | x | x | x | x | x | x | Sys = system ◆ ○ |
| 37 | A L1 dmd | x | x | x | x | x | x | |
| 38 | A L2 dmd | o | x | x | x | x | x | |
| 39 | A L3 dmd | o | o | x | x | x | x | |
| 40 | A L dmd | x | x | x | x | x | x | □ ◆ |
| 41 | A L1 THD | x | x | x | x | x | x | |
| 42 | A L2 THD | o | x | x | x | x | x | |
| 43 | A L3 THD | o | o | x | x | x | x | |
| 44 | V L1 THD | x | x | x | x | x | x | |
| 45 | V L2 THD | o | x | x | x | x | x | |
| 46 | V L3 THD | o | o | x | x | x | x | |
| 47 | kWh | x | x | x | x | x | x | Total and partial |
| 48 | kvarh | x | x | x | x | x | x | Total and partial |
| 49 | hours | x | x | x | x | x | x | |

(x) = available (o) = not available

(◆) These variables are available also as MAX detection and data storage (on EEPROM at power down).

(Ⓟ) These variables are available also as MIN detection and data storage (on EEPROM at power down).

(□) Highest value among the 3-phase.

(○) Alarm available only on the consumed power (+).

(#) These variables are available also for the MAX values, which have not been stored in the EEPROM at power down.


(Δ) These variables are available also for the MIN values, which have not been stored in the EEPROM at power down.

Alarm parameters and logic




- Block enable.
- Controlled variable (VLN, ...).
- Alarm type (up, down, in window, out window).
- Activation function.
- ON set-point.
- OFF set-point.
- ON delay.
- Logical function (AND, OR).
- Digital output (1, 2).

A, B, C... up to 16
parameter control
blocks.

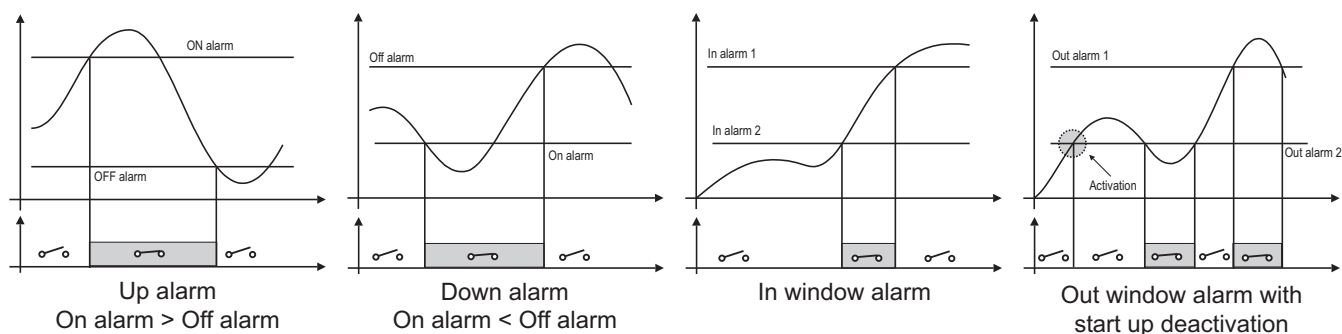

Note: any alarm working mode can be linked to the "Start-up deactivation" function which disables only the first alarm after power on of the instrument.

AND/OR logical alarm examples:

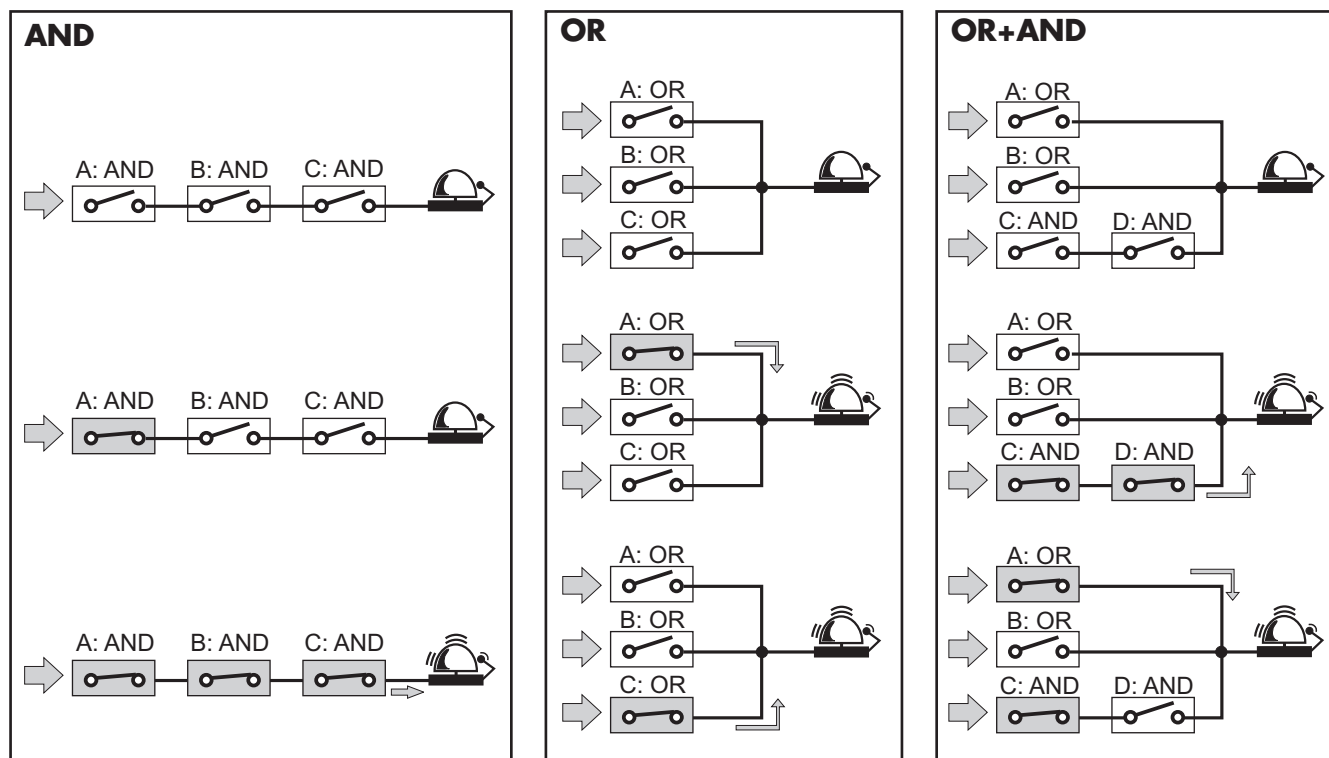


Display pages

Display variables in 3-phase systems (in a 3-phase system with neutral)

| No | 1 st variable | 2 nd variable | 3 rd variable | Note |
|----|--------------------------|--------------------------|--------------------------|---|
| 1 | % | "ASY" | "L N" | Phase to neutral asymmetry |
| 2 | V L1 | V L2 | V L3 | |
| 3 | V LN sys | | PF sys | Sys = system |
| 4 | V LL sys | | PF sys | Decimal point blinking on the right of the display |
| 5 | V L1 2 | V L2 3 | V L3 1 | Decimal point blinking on the right of the display |
| 6 | % | "ASY" | "L L" | Phase to phase asymmetry |
| 7 | "PH" | "SEq" | 1 2 3 / 1 3 2 | Phase sequence |
| 8 | A L1 | A L2 | A L3 | |
| 9 | A dmd L1 | A dmd L2 | A dmd L3 | dmd = demand (integration time selectable from 1 to 30 minutes) |
| 10 | An | "n" | Hz | An= neutral current |
| 11 | W L1 | W L2 | W L3 | |
| 12 | W dmd L1 | W dmd L2 | W dmd L3 | dmd = demand (integration time selectable from 1 to 30 minutes) |
| 13 | PF L1 | PF L2 | PF L3 | |
| 14 | var L1 | var L2 | var L3 | |
| 15 | VA L1 | VA L2 | VA L3 | |
| 16 | VA sys | W sys | var sys | |
| 17 | VA dmd sys | W dmd sys | Hz | dmd = demand (integration time selectable from 1 to 30 minutes) |
| 18 | V max L1 | V max L2 | V max L3 | Max value of phase to neutral voltage |
| 19 | V min L1 | V min L2 | V min L3 | Min value of phase to neutral voltage |
| 20 | A max L1 | A max L2 | A max L3 | Max value of current |
| 21 | A min L1 | A min L2 | A min L3 | Min value of current |
| 22 | W max L1 | W max L2 | W max L3 | Max value of W |
| 23 | PF min L1 | PF min L2 | PF min L3 | Min value of PF |
| 24 | VA dmd sys max | W dmd sys max | "H" | Max system dmd |
| 25 | A dmd max | | "H" | Highest value among the 3-phase |
| 26 | V L1 THD | V L2 THD | V L3 THD | |
| 27 | A L1 THD | A L2 THD | A L3 THD | |
| 28 | h (MSD) | h | h (LSD) | Hour counter |
| 29 | kvarh (MSD) | kvarh | kvarh (LSD) | Partial counter |
| 30 | kWh (MSD) | kWh | kWh (LSD) | Partial counter |
| 31 | kvarh (MSD) | kvarh | kvarh (LSD) | Total counter |
| 32 | kWh (MSD) | kWh | kWh (LSD) | Total counter |


MSD: most significant digit

LSD: least significant digit

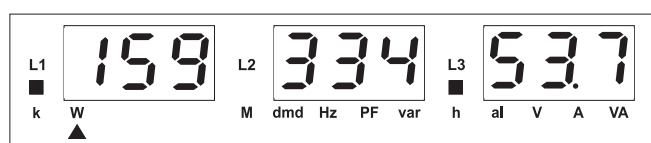

1) Example of kWh visualization:

This example is showing 15 933 453.7 kWh

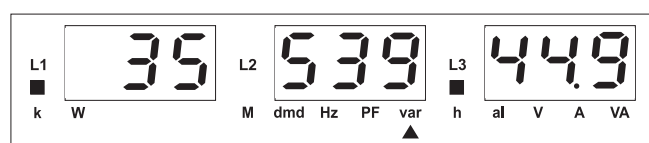

2) Example of kvarh visualization:

This example is showing 3 553 944.9 kvarh

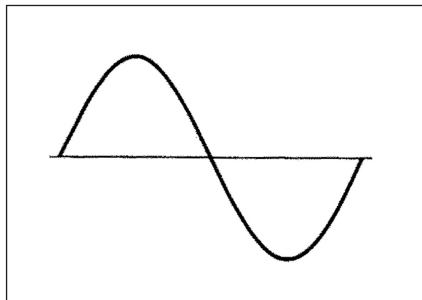
Waveform of the signals that can be measured

Figure A
Sine wave, undistorted

Fundamental content 100%
Harmonic content 0%
 $A_{rms} = 1.1107 | \bar{A} |$

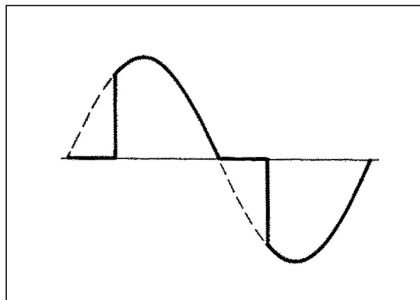


Figure B
Sine wave, indented

Fundamental content 10...100%
Harmonic content 0...90%
Frequency spectrum: 3rd to 16th harmonic
Additional error: <1% FS

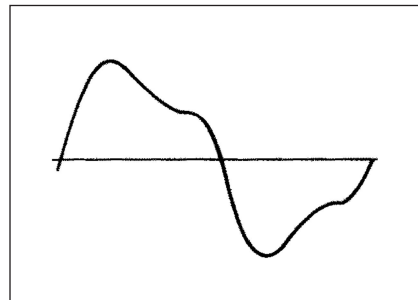
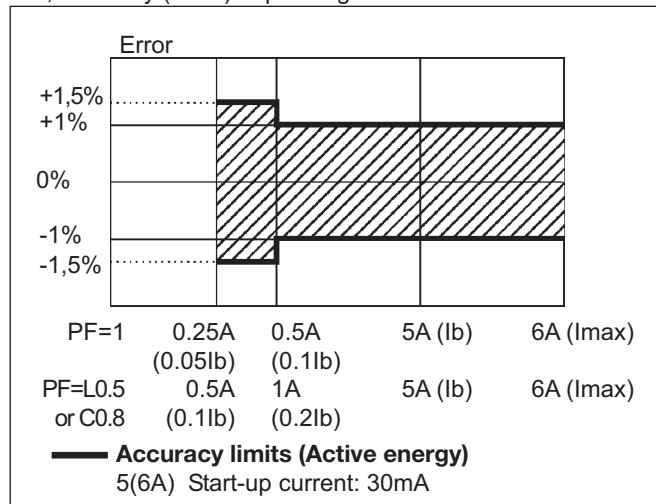
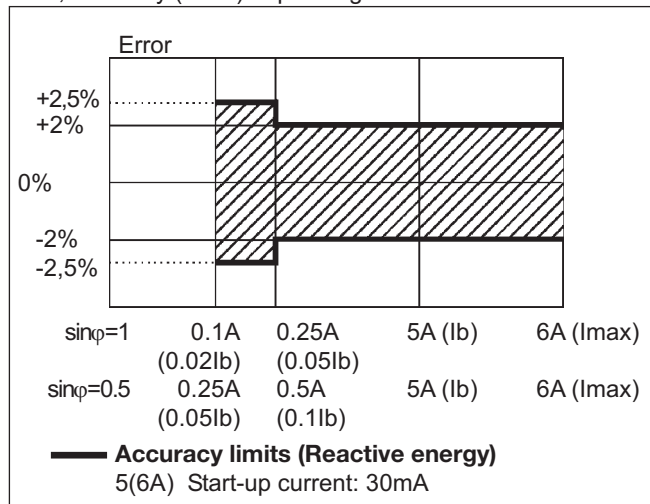


Figure C
Sine wave, distorted

Fundamental content 70...90%
Harmonic content 10...30%
Frequency spectrum: 3rd to 16th harmonic
Additional error: <0.5% FS

Accuracy**Wh**, accuracy (RDG) depending on the current**varh**, accuracy (RDG) depending on the current**Used calculation formulas****Phase variables**

Instantaneous effective voltage

$$V_{IN} = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (V_{INi})^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_{i=1}^n (V_{INi}) \cdot (A_{1i})$$

Instantaneous power factor

$$\cos\phi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (A_{1i})^2}$$

Instantaneous apparent power

$$VA_1 = V_{IN} \cdot A_1$$

Instantaneous reactive power

$$VAR_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

System variables

Equivalent three-phase voltage

$$V_x = \frac{V_{12} + V_{23} + V_{31}}{3}$$

Three-phase reactive power

$$VAR_x = (VAR_1 + VAR_2 + VAR_3)$$

Neutral current

$$An = \bar{A}_{L1} + \bar{A}_{L2} + \bar{A}_{L3}$$

Three-phase active power

$$W_x = W_1 + W_2 + W_3$$

Three-phase apparent power

$$VA_x = \sqrt{W_x^2 + VAR_x^2}$$

Three-phase power factor (TPF)

$$\cos\phi_x = \frac{W_x}{VA_x}$$

Energy metering

$$kWh_i = \int_{t_1}^{t_2} P_i(t) dt \approx \Delta t \sum_{n_1}^{n_2} P_{i,n}$$

$$kVarh_i = \int_{t_1}^{t_2} Q_i(t) dt \approx \Delta t \sum_{n_1}^{n_2} Q_{i,n}$$

Where:


i= considered phase (L1, L2 or L3)
P= active power; Q= reactive power;
 t_1, t_2 =starting and ending time points of consumption recording; n= time unit; Δt = time interval between two successive power consumptions;
 n_1, n_2 = starting and ending discrete time points of consumption recording

Harmonic Analysis






| | | | |
|-----------------------------|--|-----------------------------------|---|
| Analysis principle | FFT | Display of harmonic values | THD % |
| Harmonic measurement | | Others | The harmonic distortion can be measured in both 3-wire or 4-wire systems. |
| Current | Up to 15th harmonic | | |
| Voltage | Up to 15th harmonic | | |
| Type of harmonics | THD (VL1) THD (VL2) THD (VL3) THD (AL1) THD (AL2) THD (AL3) | | |

Wiring diagrams

When the CT is connected to earth, a leakage current from 0 to 1.8mA max is generated, whose value depends on the input impedance values of the instrument, on the type of connection and on the line voltage measured by the instrument.

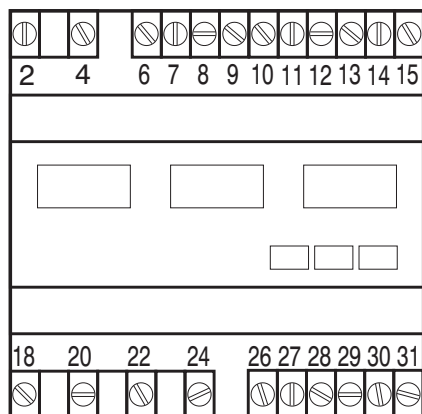


F1= 315mA

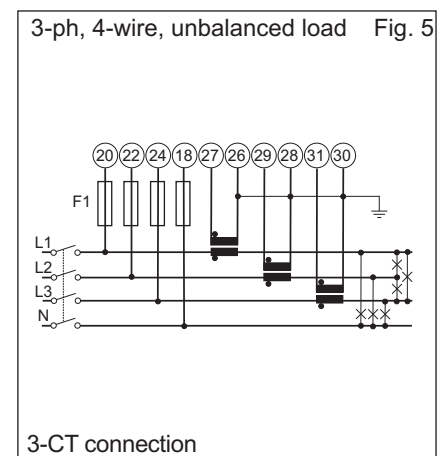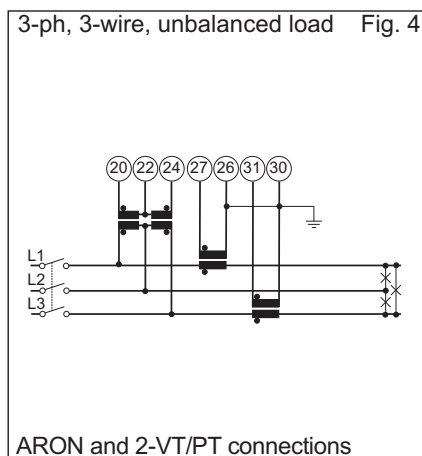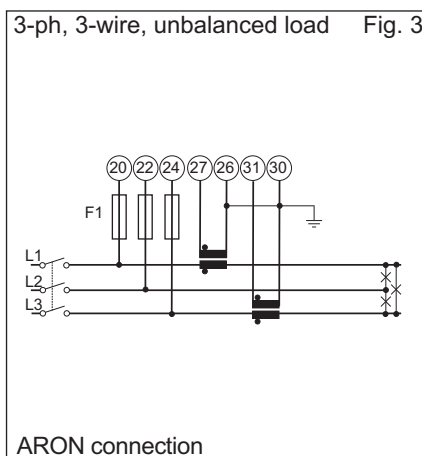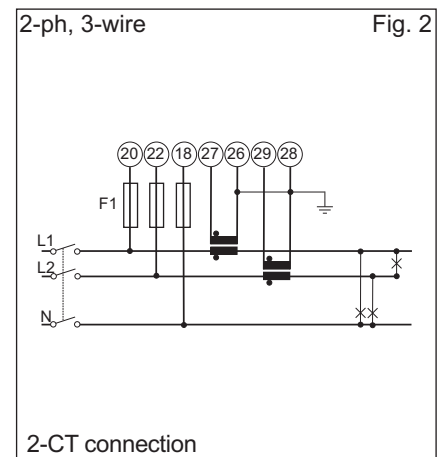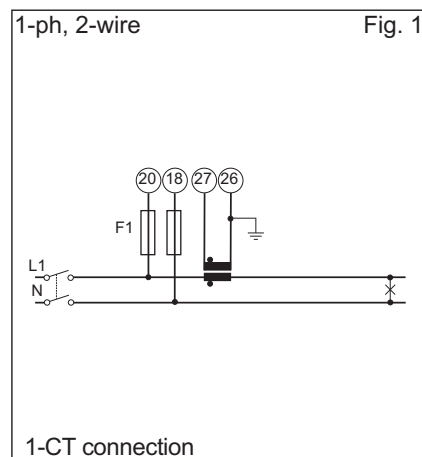


NOTE: the current inputs can be connected to the mains **ONLY** by means of current transformers. The direct connection is not allowed.

Wiring diagrams

When the CT is connected to earth, a leakage current from 0 to 1.8mA max is generated, whose value depends on the input impedance values of the instrument, on the type of connection and on the line voltage measured by the instrument.

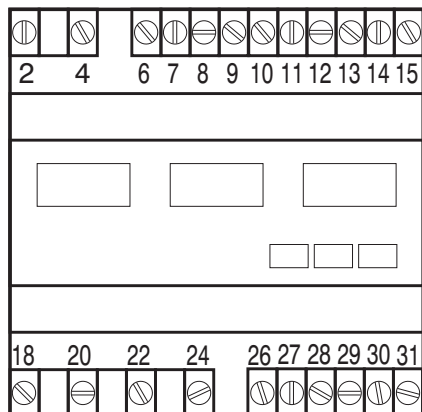


3-ph, 4-wire, unbalanced load Fig. 6

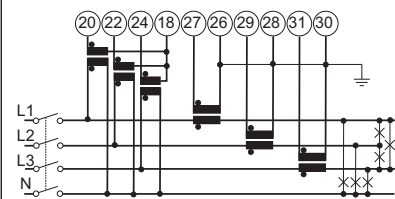


3-CT and 3-VT/PT connections

3-ph, 3-wire, unbalanced load Fig. 7

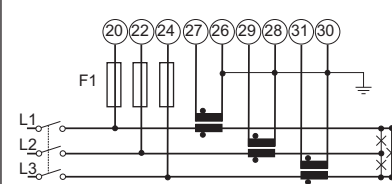


3-CT connection

3-ph, 3-wire, unbalanced load Fig. 8

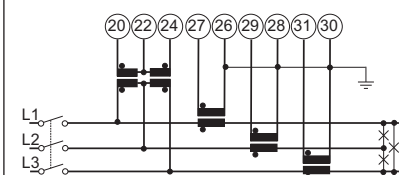


3-CT and 2-VT/PT connections

3-ph, 3-wire, balanced load Fig. 9

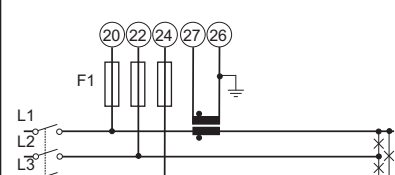


1-CT connection

3-ph, 4-wire balanced load Fig. 10

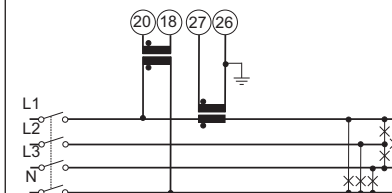


1-CT and 1-VT/PT connections

3-ph, 4-wire, balanced load Fig. 11

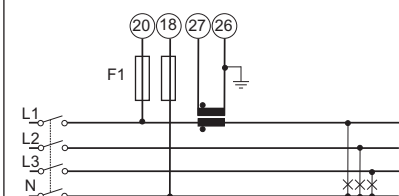

1-CT connection

Fig. 12



Power supply connection

NOTE: the current inputs can be connected to the mains **ONLY** by means of current transformers. The direct connection is not allowed.

Output connections

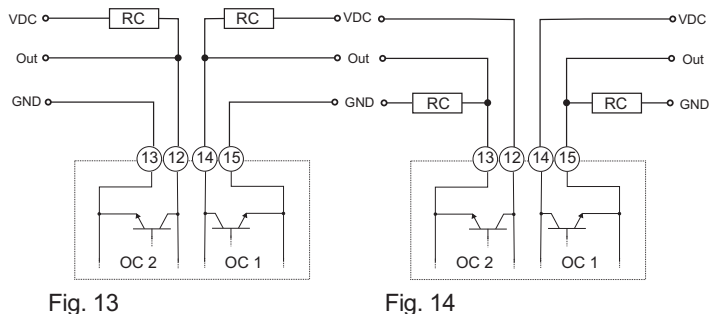


Fig. 13

Fig. 14

Open collector outputs: The load resistance (R_c) must be designed so that the closed contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30V. VDC: external power supply voltage. Out: positive output contact (open collector transistor). GND: ground output contact (open collector transistor).

Relay out.




Fig. 15

RS485 port



Fig. 16



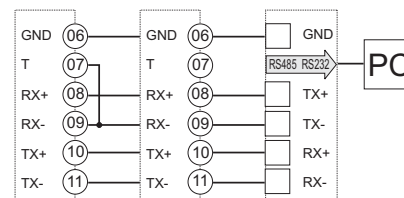


Fig. 17

Front Panel Description

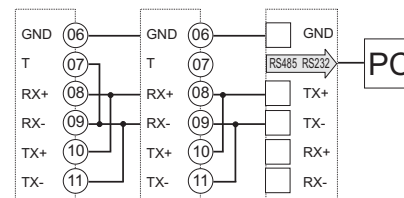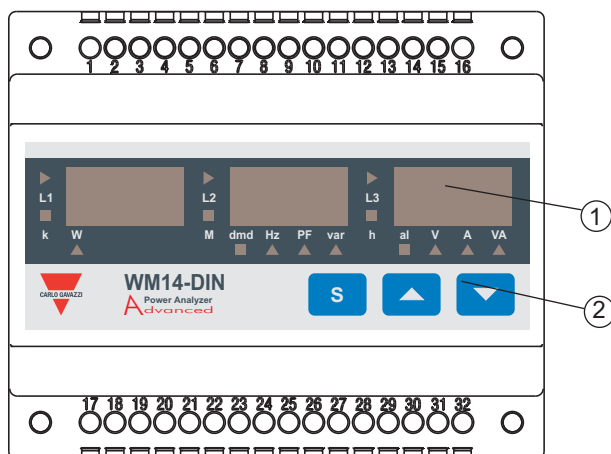

1. Display

LED-type with alphanumeric indications to:

- display configuration parameters;
- display all the measured variables.

2. Key-pad

To program the configuration parameters and the display of the variables.



Key to enter programming and confirm selections;



Keys to:

- programme values;
- select functions;
- display measuring pages.

Dimensions and Panel Cut-out

