


Excel Cat6A UTP Unscreened Low Profile Keystone Jack Toolless Black

Item Code: 100-182-BK

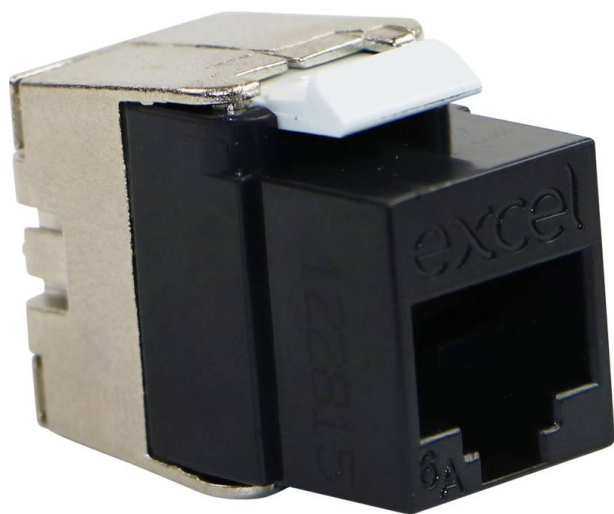

✕ High quality polymer housing with a die cast metallic back

✕ Toolless termination design

✕ Low profile design - just 28mm overall depth

✕ Supports 10 Gigabit Ethernet application

✕ Choice of colours

✕ 3rd Party ISO11801 2nd Edition verification

Product Overview

100-182-BK Excel Cat6a UTP Unscreened Low Profile Keystone Jack Toolless Black, available as part of our range of excel cat6a keystone jacks for RJ45 network connections.

This Low Profile Cat6a Keystone Jack is a reduced size toolless termination RJ45 socket which allows for multiple cable entry directions when this jack is mounted in a standard depth back box. This supports options including flush shutters at the outlet and angled shutters often used with keystone jacks.

Product Specifications

Feature	Values
Model	Jack
Type of connector	RJ45 8(8)
Shielded	no
Category	6A (IEC)
Requires termination tool	no
Suitable for round cable	yes
Suitable for flat cable	no
Suitable for solid core	yes
Colour	Black

Excel Cat6A UTP Unscreened Low Profile Keystone Jack Toolless Black

Item Code: 100-182-BK




AWG-range

22...26

Additional specifications

Features	Values
Depth	28.3mm
Height	21.5mm
Housing	Die cast Zinc-alloy & ABS High-Impact
RJ45 Contacts	Nickel plated phosphor bronze alloy with 50 micro-inch Gold plating
IDC Contacts	Tin plated phosphor bronze alloy
RJ45 Life	Minimum 750 insertions
Storage temperature	-40 to +70°C
Operating temperature	-10 to +60°C

Product drawing

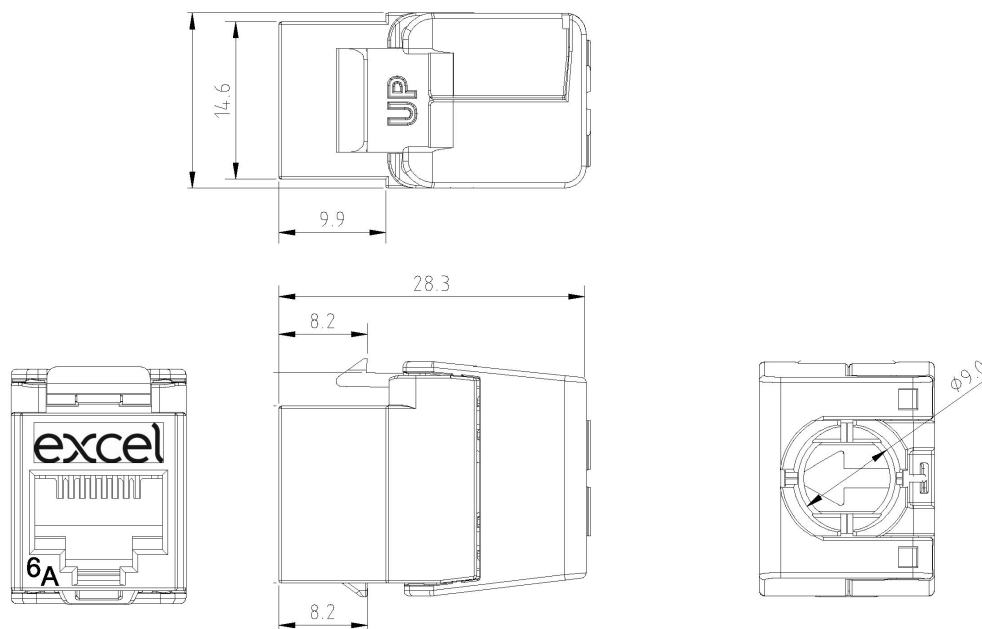

Excel Cat6A UTP Unscreened Low Profile Keystone Jack Toolless Black

Item Code: 100-182-BK



Included accessories

Accessories	Singles	24-packs
Nylon cable tie	1	24
Wiring cap	1	24

Standards

Applicable standard	Detail
RoHS	Compliant to the Restriction of Hazardous Substances
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.
WFD	Compliant to Waste Framework Directive
SCIP	Compliant - Does Not Contain Substances of Concern in Products

Part Number Table

Part Number	Description
100-182-BK	Excel Cat6A UTP Unscreened Low Profile Keystone Jack Toolless Black
100-182-BK-24	Excel Cat6A UTP Unscreened Low Profile Keystone Jack Toolless Black (Box 24)
100-182-WT	Excel Cat6A UTP Unscreened Low Profile Keystone Jack Toolless White
100-182-WT-24	Excel Cat6A UTP Unscreened Low Profile Keystone Jack Toolless White (Box 24)

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.