



Surface-mounted power socket Schuko standard

Cat. No(s): 860 29/31/56/67/77 - 861 29/56

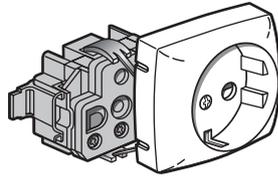

0 861 29

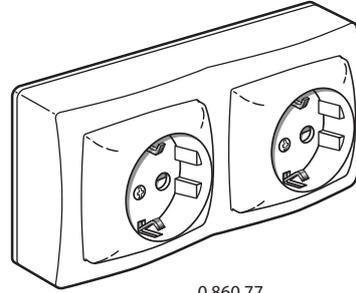

0 860 77


1. USE

Power sockets 16 A - 250 V~ conforming to Schuko standard.

2. RANGE

Description	Complete	Configurable
2 P+E	0 860 29	0 861 29
2 P+E with safety shutters	0 860 31	-
2 P+E tamperproof	0 860 56	0 861 56
2-gang - 2 x 2 P+E with safety shutters	0 860 77	-
2-gang - two-way switch and P+E with safety shutters	0 860 67	-

3. DIMENSIONS (mm)

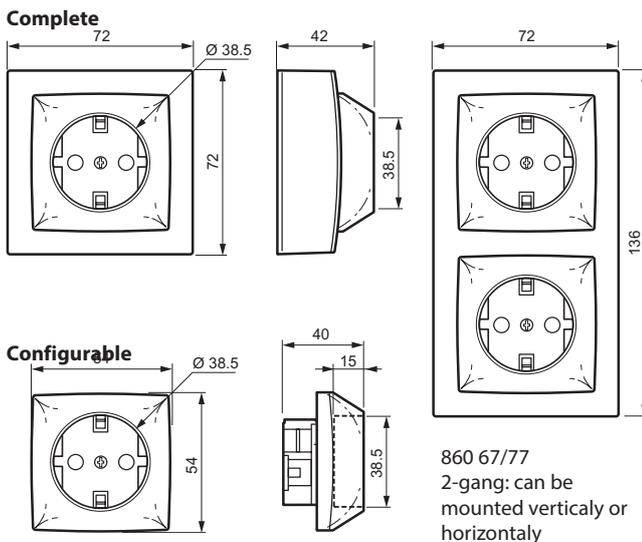

4. CONNECTION

Type of terminals: with screws
 Terminals capacity: 2 x 2.5 mm²
 Option of two wires per terminal for tapping
 Stripping length: 7 mm
 Screwdriver: Posidrive 1, Philips 1, flat 4 mm.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 31D (complete product)
 Protection against impact: IK 04

■ 5.2 Material characteristics

Plate, frame, coverplate: Plastic
 Colour: White RAL 9003
 UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~
 Current: 16 A
 Frequency: 50 Hz

■ 5.4 Climatic characteristics

Use and storage temperature: - 5° C to + 40° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e. catalogue.