


Niloé™ Step Two-way switch and push button IP 44

Cat. No(s): 8 641 33/34

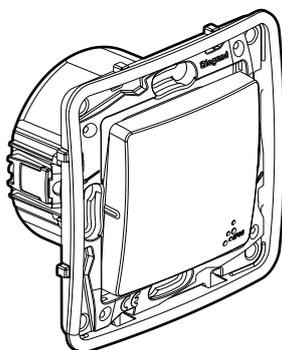


1. USE

Lighting controls mechanisms.
Supplied with protection cover.
Flush or surface mounting.
Screw or screw and claw mounting with claws.
To be fitted with one-gang or multi-gang plates.

2. RANGE

Description	White
IP 44 Two-way switch 10 AX	8 641 33
IP 44 Changeover push-button 6 A	8 641 34

3. DIMENSIONS (mm)

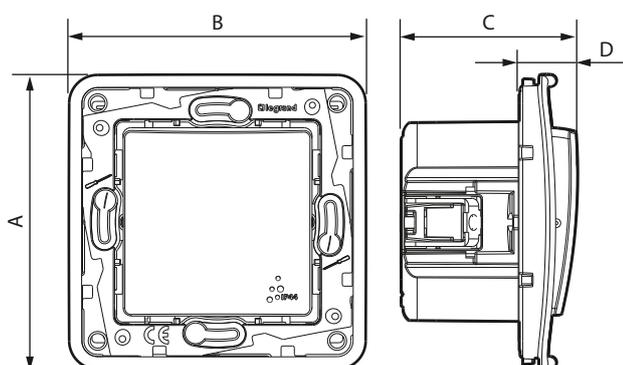

A	B	C	D
78.5	78.5	47	15.5

4. CONNECTION

Type of terminals: automatic
Terminal capacity: 2 x 2.5 mm²
Stripping length: 13 mm
Compatible with flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 44
Protection against mechanical impact: IK 04

■ 5.2 Material characteristics

Material: - Box of the mechanism: PC
- Rocker: ABS
- Halogen free
- UV resistant
- Claws: steel
- Protection cover: SEBS

Material of the support: - PC
- Halogen free

Self-extinguishing:
+ 850° C / 30 s for insulating parts holding live parts in place.
+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: - Two-way switch: 10 AX,
Maximum power on integrated ballast lamps: 100 W
- Push-button: 6 A
Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage and use temperature: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products:
Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia,
Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e.catalogue.