

Explosion-protected LED ceiling- or wall-mounting light fitting

ExGLOBE

e9312F

[Item no. : 93120 0002]



General product description



Explosion-protected LED wall- or ceiling-mounted light fitting ExGLOBE for zone 1/21. Die-cast aluminium housing with moulded fixing points, unpainted, electrical kit made of die-cast aluminium with LED module and integrated ECG. Frosted PC cover.

General product benefits

- robust, corrosion-resistant housing
- impact-resistant PC cover
- impact-resistant PC cover
- homogenous illumination due to frosted PC cover for comfortable perception of light and brilliant glare limitation
- easy mounting due to outer fixing points

Applications

Hazardous areas zone 1 (gas) and zone 21 (dust) with minimal requirements for illuminance, confined space conditions or hard-to-reach areas

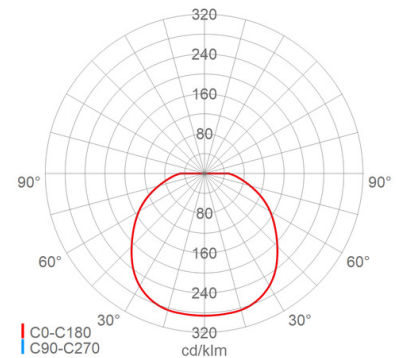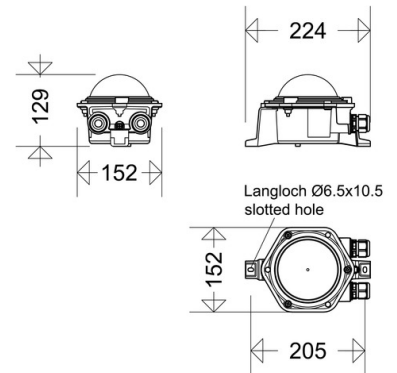

Explosion-protected LED ceiling- or wall-mounting light fitting

ExGLOBE**e9312F****[Item no. : 93120 0002]****Technical data****Explosion protection**

EX-Zone:	1, 2, 21, 22
EX-marking gas:	II 2 G Ex eb mb IIC T4 Gb
EX-marking dust:	II 2 D Ex tb IIIC T80 °C Db
Primary ignition protection method:	eb
Temperature class:	T4
Surface temperature:	T80°C
ATEX:	IBExU20ATEX1092
IECEX:	IECEX IBE 20.0013

Dimension/Weight

Width/Diameter:	152.00 mm
Height:	143.00 mm
Net weight:	1.15 kg
EAN/GTIN:	4041254347318

Key technical data

Light source:	LED
Connected load:	11 W
Luminaire luminous flux:	600 lm
Luminous efficacy:	55 lm/W
Colour temperature:	6500 K
Colour rendering (CRI):	≥ 0
Admissible ambient temperature T _a :	-25 °C to +40 °C
Control gear:	1 x ECG

Lighting technology

Light distribution:	rotationally symmetrical beam
---------------------	-------------------------------

Electrical connection

Rated voltage:	220 - 240 V, 0 Hz, 50/60 Hz
Terminal clamp:	Cage clamp, 3-polig, 1 - 2.5 mm ²
Max. no. (with CB B16):	130
CB B10/B13/B20/B25:	81/105/162/202
CB C10/C13/C16/C20/C25:	135/175/221/270/338
Cable entries:	M25 (2x), cable gland (2x), Plastic, 8 - 17 mm

Housing

Housing material:	Die-cast aluminium
-------------------	--------------------

Cover

Cover type/material:	Diffuser (PC)
Cover characteristic:	satined
Closure:	screwed (Galvanised steel)

Mounting

Mounting method (accessories possibly needed):	Ceiling, Wall
Operating position:	downwards radiation, forwards radiation, vertical, horizontal
Mounting:	2-point

Features/Certificates

Protection class:	I
IP rating:	IP66
Approval marks:	CE
Energy efficiency class:	G

Dimension/Weight

Length:	224.00 mm
---------	-----------

Explosion-protected LED ceiling- or wall-mounting light fitting

ExGLOBE

e9312F

[Item no. : 93120 0002]

Optional accessories/spare parts

Item no.	Item name	Item description
93101 9000	9309F Ersatzglas	spare glass frosted
93101 9001	930A Ersatzschutzkorb	spare wire guard
90117 9000	2537	Ex-protected plastic cable gland M25x1.5
90118 9000	2538	Ex-protected plastic screw plug M25x1.5