



ENVIRONMENTAL PRODUCT DECLARATION

SINAMICS G220

High-end drives for
continuous motion

Type II according to ISO 14021 including life cycle impact assessment (LCIA)



SIEMENS

General information

This environmental product declaration (EPD) is based on the international standard ISO 14021 ("Environmental labels and declarations – Self declared environmental claims – Type II environmental labelling"). The data in this EPD has been evaluated on a full-scale life cycle assessment (LCA) study according to ISO 14040/44, taking into account the product category rules (PCR) for electronic and electrotechnical products and systems defined in EN 5069. Use phase is defined according to EN 50598-3 Ecodesign for power drive systems, motor starters, power electronics and their driven applications – Part 3: Quantitative eco design approach through life cycle assessment including product category rules and the content of environmental declarations.

Siemens is dedicated to an environmentally conscious design of its products in line with IEC 62430 and has implemented an integrated management system according to ISO 9001, ISO 14001 and ISO 45001.


Products	SINAMICS G220 in frame sizes FSA, FSB, FSC, FSD1, FSD2 and FSE, and FSF1 voltage classes 200 V...240 V 3 AC (0.55 kW - 30 kW) and 380 V...500 V 3 AC (1.1 kW - 55 kW) in IP20 degree of protection.
Represented by the reference product	6SL4113-0CA21-2AF0, 22 kW (LO), 3AC 380-500V, Filter C2, IP20, PROFINET
Product Description	SINAMICS G220 converter, safety & security integrated, IP20, air cooling, analog and digital I/Os, PROFINET, Modbus TCP/IP, EtherNet/IP
Functional Unit	Speed and torque control of asynchronous induction motors, synchronous reluctance motors and permanent-magnet synchronous motors. ¹

¹ The lifetime value used for calculation is a reference value and does not equate with the minimum, average or real life time.

Material composition

The following chart outlines the overall material composition of the calculated reference product without packaging. Product weight of 18.0 kg adds up with packaging weight of 1.54 kg to a total weight of 19.54 kg. Packaging consists of: PE film, Graphic paper, Corrugated box (average composition), Polyethylene foam.

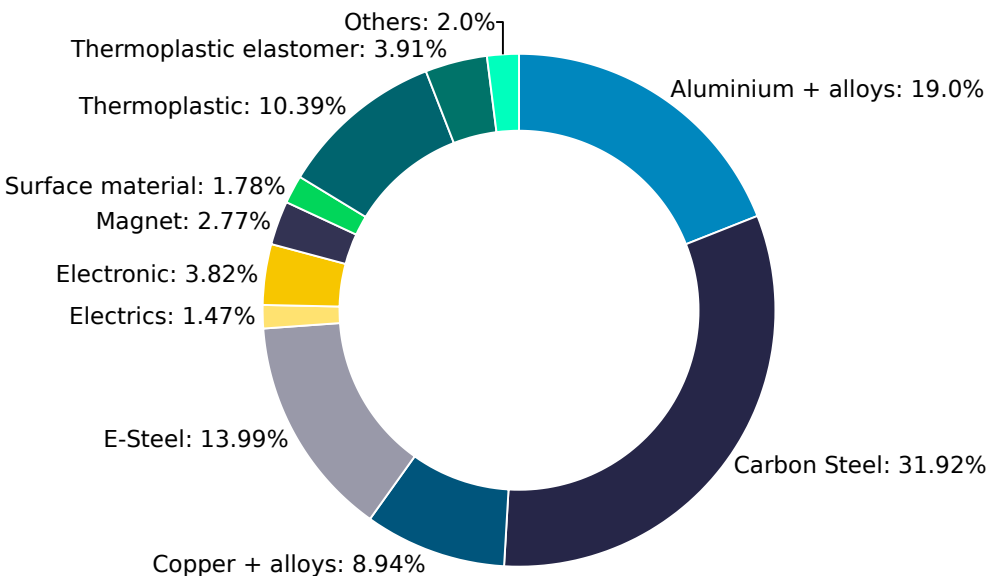


Product Weight 18.0 kg



Substance assessment

At Siemens, we are committed to the development and production of environmentally sound and sustainably produced equipment. This includes avoiding hazardous substances in our products without compromising their benefits for our customers.

Life cycle stages and reference scenarios

 Manufacturing This stage covers the extraction of natural resources, production of raw materials, manufacturing, packaging, and transportation.	 Distribution and Operation This stage covers the product's distribution, installation, use, and maintenance. Different operating conditions can lead to deviations from the reference scenario.	 End-of-Life This stage covers the disassembly or shredding and material recycling of all recyclable materials, as well as energy recovery, thermal treatment and the disposal of all other materials.
Scenarios		
Energy model used: Transportation model: Truck 7.5t-12t gross weight 1000km average distance	Energy model used: Distribution scenario: Use Scenario: Operation profile: Rated power 22kW Voltage class 400V Life time 15 years Annual operation 5000 hour/year Energy mix : Europe (standard mix)	Energy model used: End-of-Life methodology: End-of-life methodology: Cut-off (plastic waste incineration without energy recovery)

Key environmental performance indicators

The following impact categories characterize the product's environmental footprint. They have been calculated with LCIA methodology EF3.1; LCA tool: Green Digital Twin (GDT), Database: One Siemens LCA Database (based on MLC CUP 2023.2, formerly GaBi).


To ensure the high quality and completeness of the LCA results, Primary Data have been used whenever possible. Datasets for resources, such as electrical energy or natural gas, are chosen from the region where the device is produced and assembled. If primary data are not available, datasets reflecting state-of-the-art manufacturing technology are considered.

For products belonging to the same homogeneous product family range the following extrapolation criteria (Annex) can be used to derive their climate change impact in kg CO₂ eq. The rest of the listed impacts will be determined in the next version of the EPD.

Impact Category	Unit	Total	Manufacturing	Distribution	Operation	End of life
Acidification	Mole of H+ eq	1.81E+1	2.85E+0	6.34E-3	1.56E+1	-3.24E-1
Climate change – total	kg CO ₂ eq	7.52E+3	1.84E+2	4.37E+0	7.38E+3	-4.09E+1
Climate change – fossil	kg CO ₂ eq	7.46E+3	1.84E+2	4.32E+0	7.31E+3	-4.09E+1
Climate change – biogenic	kg CO ₂ eq	6.50E+1	3.56E-1	1.18E-2	6.47E+1	-2.93E-2
Climate Change, land use and land use change	kg CO ₂ eq	8.62E-1	9.43E-2	4.06E-2	7.97E-1	-2.96E-2
Ecotoxicity, freshwater – total	CTUe	4.36E+4	9.96E+2	4.28E+1	4.27E+4	-1.70E+2
Eutrophication, freshwater	kg P eq	2.80E-2	6.29E-4	1.60E-5	2.74E-2	-2.79E-5
Eutrophication, marine	kg N eq	4.04E+0	3.41E-1	2.27E-3	3.73E+0	-4.01E-2
Eutrophication, terrestrial	Mole of N eq	4.23E+1	3.73E+0	2.70E-2	3.90E+1	-4.26E-1
Human toxicity, cancer – total	CTUh	2.39E-6	1.35E-7	8.67E-10	2.26E-6	-6.69E-9
Human toxicity, non-cancer – total	CTUh	3.91E-5	3.45E-6	3.86E-8	3.60E-5	-3.90E-7
Ionising radiation, human health	kBq U235 eq	4.06E+3	1.01E+1	1.67E-2	4.05E+3	-3.52E+0
Land Use	dimensionless (pt)	6.09E+4	4.11E+2	2.49E+1	6.05E+4	-8.78E+1
Ozone depletion	kg CFC-11 eq	1.81E-7	4.63E-8	5.70E-13	1.35E-7	-2.15E-10
Particulate matter	Disease incidences	1.57E-4	2.97E-5	5.51E-8	1.31E-4	-3.60E-6
Photochemical ozone formation, human health	kg NMVOC eq	1.09E+1	1.06E+0	5.52E-3	9.96E+0	-1.28E-1
Resource use, fossils	MJ	1.56E+5	2.52E+3	5.97E+1	1.54E+5	-5.48E+2
Resource use, mineral and metals	kg Sb eq	1.44E-1	1.55E-1	2.90E-7	1.13E-3	-1.20E-2
Water use	m ³ water eq deprived water	1.64E+3	3.69E+1	5.29E-2	1.61E+3	-1.04E+1

Climate change

This chart shows the overall impact of the product on climate change – total. The operations phase is the lifecycle phase with the biggest overall impact. Different operating conditions can lead to deviations from the references scenario. The distribution stage of the reference product is not shown in the chart due to its relatively small contribution to climate change and its impact is included in the operation bar.

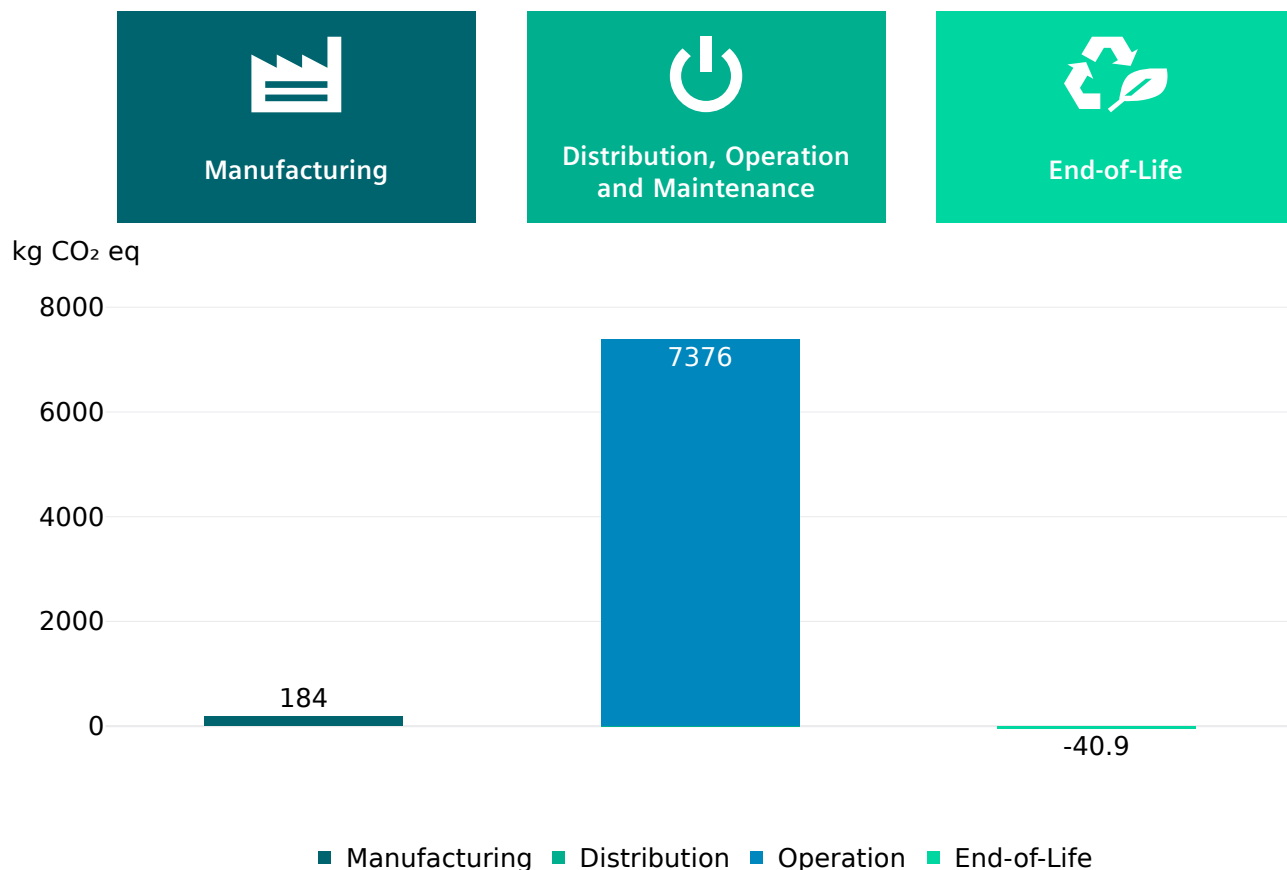

End-of-Life results



The end-of-life stage considers the recyclability rates of metal, plastics contents and minimum disposal rates according to the guidelines IEC TR 62635:2012 for end-of-life information provided by manufacturers and recyclers and for recyclability rate calculation of electrical and electronic equipment.

It leads to:

- an overall **product recyclability of up to 71%** mainly due to metal content
- an **energy recoverability of up to 15%** from plastic materials
- a **minimum disposal rate of 15%**

Note: The device should not be disposed of as unsorted municipal waste. Special treatment for specific components may be mandated by law or recommended for environmental reasons. Observe all local and applicable laws

Appendix

For other MLFBs covered by this EPD under SINAMICS G200 homogenous product family, the climate change impact (CC) in kg CO2 eq. can be calculated for the manufacturing and end of life phases using linear regression equations according to the weight in kg (m) of the assessed product.

The following equations shall be used:

Manufacturing:

$$CC = 12.253 \times m + 22.695$$

End of Life:

$$CC = 0.2104 \times m + 2.217$$

For the operation phase, the climate change in kg CO2 eq was derived for 230 V and 400 V and rated power *PR (LO)* in kW for European standard energy mix, lifetime of 15 years and annual operation 5000h/year.

Voltage	V	230	230	230	230	230	230
Pr (LO)	kW	0.55	0.75	1.1	1.5	2.2	3
Climate change	kg CO2eq	1144	1292	1639	2074	2573	2868

Voltage	V	230	230	230	230	230	230	230	230
Pr (LO)	kW	4	5.5	7.5	11	15	18.5	22	30
Climate change	kg CO2eq	3271	4259	5305	6441	8768	10550	12346	15650

Voltage	V	400	400	400	400	400	400	400
Pr (LO)	kW	1.1	1.5	2.2	3	4	5.5	7.5
Climate change	kg CO2eq	1349.788	1541.779	1992.489	2552.072	3156.140	3214.674	3940.492

Voltage	V	400	400	400	400	400	400	400	400
Pr (LO)	kW	11	15	18.5	22	30	37	45	55
Climate change	kg CO2eq	4928.542	6080.486	6493	7373	9710	11554.562	13247.358	16637.633

Legal Disclaimer

This Environmental Product Declaration (EPD) is for information purposes only. It is based upon the standards mentioned above. This EPD does not warrant or guarantee the composition of a product or that the product will retain a particular composition for a particular period. Therefore, all warranties, representations, conditions, and all other terms of any kind whatsoever implied by statute or common law are – to the fullest extent permitted by applicable law – excluded.

Siemens therefore does not assume any liability for any error or for any consequence which may arise from the use of this information to the maximum extent under the law.

Please be aware that the data of this EPD cannot be compared with data calculated based upon product category rules (PCRs) other than the standards mentioned above. The values given are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Published by

Digital Industries

Motion Control

Email

Frauenauracher Str. 80

91056 Erlangen

Germany Number Street

Postcode City

Country

Subject to changes and errors.

The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. In particular no assurance is given that those descriptions and performance features stand under warranty or guarantee in sense of any liability for any error or for any consequence which may arise from the use of this information to the maximum extent under the law. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or product names of Siemens AG or other companies whose use by third parties for their own purposes could violate the rights of the owners.

© 2024 by Siemens