SIEMENS

Data sheet 5SE2325

NEOZED fuse-link, D02, 25 A, gG, Un AC: 400 V, Un DC: 250 V, with tin-coated contact-caps



Model	
product brand name	SENTRON
product designation	NEOZED fuse link
design of the product	With tin-coated contact caps
product variations	Pack of 10
design of the fuse link	NEOZED fuse link
General technical data	
size of fuse system according to EN 60269-1	D02
operating class of the fuse link	gG
Supply voltage	
supply voltage	
 at AC rated value 	400 V
• at DC	250 V
operating voltage rated value	400 V
protection class IP	IP20, with connected conductors
switching capacity current according to IEC 60947-2 rated value	50 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.7 W
Main circuit	
operational current rated value	25 A
Appearance	
color coding of the fuse link	Yellow
maximum short-circuit current breaking capacity (Icu) at AC rated value	50 kA
Mechanical Design	
mounting position	Any, preferably vertical
net weight	12 g
ambient temperature during operation	
• minimum	-25 °C
• maximum	40 °C
environmental category	Up to 45°C at 95 % rel. humidity
Approvals Certificates	
Oursell Broduct Agreement	

General Product Approval





Confirmation







other Environment

<u>Miscellaneous</u> <u>Confirmation</u> <u>Environmental Confirmations</u>

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE2325

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/5SE2325

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2325

CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

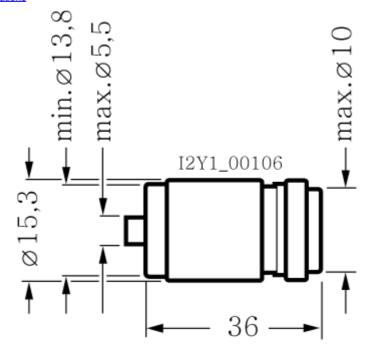

last modified: 1/27/2023 🖸