



NEOZED fuse-link, D01, 13 A, gG, Un AC: 400 V, Un DC: 250 V, with tin-coated contact-caps

Model		
product brand name		SENTRON
product designation		NEOZED fuse link
design of the product		With tin-coated contact caps
product variations		Pack of 10
design of the fuse link		NEOZED fuse link
General technical data		
size of fuse system according to EN 60269-1		D01
operating class of the fuse link		gG
Supply voltage		
supply voltage		
• at AC rated value		400 V
• at DC		250 V
operating voltage rated value		400 V
protection class IP		IP20, with connected conductors
switching capacity current according to IEC 60947-2 rated value		50 kA
Dissipation		
power loss [W] for rated value of the current at AC in hot operating state per pole		1.5 W
Main circuit		
operational current rated value		13 A
Appearance		
color coding of the fuse link		Black
maximum short-circuit current breaking capacity (Icu) at AC rated value		50 kA
Mechanical Design		
mounting position		Any, preferably vertical
net weight		7 g
ambient temperature during operation		
• minimum		-25 °C
• maximum		40 °C
environmental category		Up to 45°C at 95 % rel. humidity
Approvals Certificates		
General Product Approval	other	Environment

[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

[Environmental Con-
firmations](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE2013-2A>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SE2013-2A>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2013-2A

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

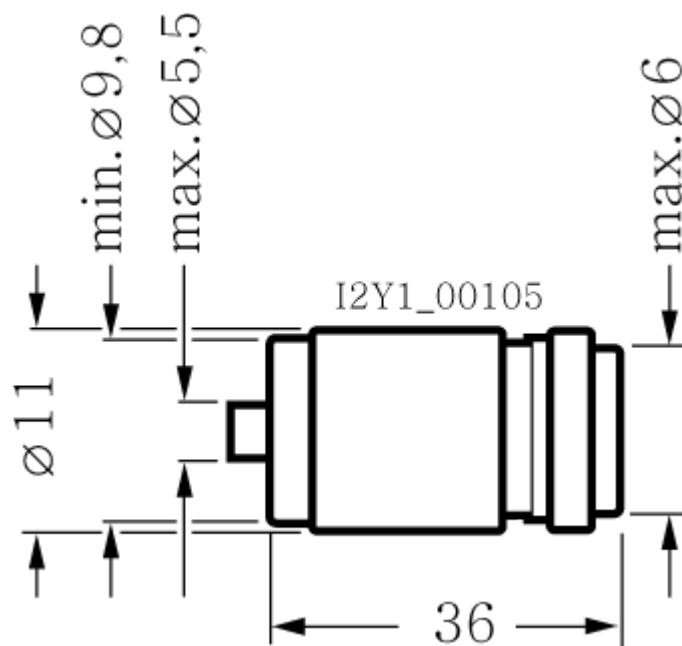

last modified:

1/27/2023 

