## SIEMENS

## Data sheet

## 8WH1000-0AF06




Terminal, screw terminal, through-type terminal, 2.5 mm<sup>2</sup>, yellow

Model	
product brand name	SENTRON
product designation	Terminal blocks
design of the product	terminal block
product variations	accessories
design of terminal terminal levels internally linked	No
operating voltage rated value	1 000 V
Protection class	
combustibility class according to UL 94	V0
Main circuit	
operational current rated value	24 A
Appearance	
color	yellow
Product details	
product component required end cover plate	Yes
Number	
number of terminal levels	1
number of terminal points per terminal level	2
Connections	
connectable conductor cross-section solid	
• minimum	0.14 mm²
• maximum	4 mm²
connectable conductor cross-section stranded	
• minimum	1.5 mm <sup>2</sup>
• maximum	0.14 mm²
connectable conductor cross-section finely stranded	
<ul> <li>with core end processing minimum</li> </ul>	0.14 mm <sup>2</sup>
<ul> <li>with core end processing maximum</li> </ul>	2.5 mm <sup>2</sup>
<ul> <li>without core end processing minimum</li> </ul>	0.14 mm <sup>2</sup>
<ul> <li>without core end processing maximum</li> </ul>	4 mm <sup>2</sup>
tightening torque with screw-type terminals	
• minimum	0.6 N·m
• maximum	1 N·m
type of connection 1	screw-type terminal
type of connection 2	screw-type terminal
position of the terminal	lateral
Mechanical Design	
height	48 mm
height with lowest-profile installation	47.5 mm
depth	46.85 mm

length		48 m	m		
fastening method		TH35	DIN rail		
net weight		8 g			
material of the insulating body			Other		
Environmental conditi	ons				
ambient temperature	during operation				
<ul> <li>minimum</li> </ul>		-60 °(	C		
<ul> <li>maximum</li> </ul>		105 °	С		
opprovals Certificates					
General Product Ap	proval				other
	<u>Confirmation</u>	CE EG-Konf.	<b>See</b> UR	EHC	<u>Miscellaneous</u>
other	Environment				
<u>Confirmation</u>	Environmental Con- firmations				
Further information					
https://press.siemens. Siemens is working Please contact your lo	d to exit the Russian market (see com/global/en/pressrelease/sieme on the renewal of the current EA cal Siemens office on the status of (other than the sanctioned EAEU m	ns-wind-down-ruse .C certificates. f validity of the EA	C certification if you inten	d to import or offer to su	oply these products to an
Information on the p					
	y.siemens.com/cs/ww/en/view/109				
	wnloadcenter (Catalogs, Brochus om/lowyoltage/catalogs	res,)			
Industry Mall (Online	e ordering system)				
	emens.com/mall/en/en/Catalog/pro		<u>000-0AF06</u>		
	anuals, Certificates, Characterist y.siemens.com/cs/ww/en/ps/8WH1				
Image database (pro	oduct images, 2D dimension draw	vings, 3D models	, device circuit diagram <u>)AF06</u>	ıs,)	
CAx-Online-Generate	or				

Tender specifications http://www.siemens.com/specifications

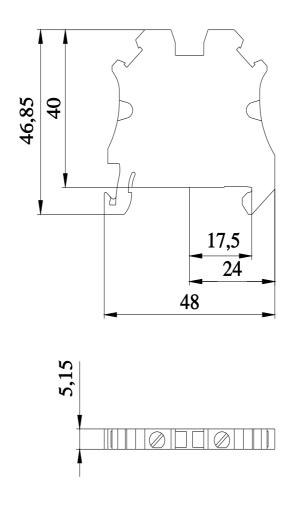

last modified:

8/11/2023 🖸