SIEMENS

Data sheet





product brand name	SIRIUS ACT
product designation	Indicator lights
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Plastic, black, 22 mm
Actuator	
product extension optional	
• light source	Yes
contact module	No
color	
of the actuating element	blue
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.45 mm
Front ring	
product component front ring	No
General technical data	
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
 for railway applications according to EN 61373 	Category 1, Class B
vibration resistance	
according to IEC 60068-2-6	10 500 Hz: 5g
 for railway applications according to EN 61373 	Category 1, Class B
reference code according to IEC 81346-2	P
Substance Prohibitance (Date)	10/01/2014
Connections/ Terminals	
tightening torque of the screws in the bracket	1 1.2 N·m
Ambient conditions	
ambient temperature	
	-25 +70 °C
 during operation 	20 170 0
during operationduring storage	-40 +80 °C
during storage environmental category during operation according to IEC	-40 +80 °C
during storage environmental category during operation according to IEC 60721	-40 +80 °C
during storage environmental category during operation according to IEC 60721 Environmental footprint	-40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)
during storage environmental category during operation according to IEC 60721 Environmental footprint Environmental Product Declaration(EPD)	-40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)

Global Warming Potential [CO2 eq] after end of life	-0.015 kg	
Installation/ mounting/ dimensions		
height	29.5 mm	
width	29.5 mm	
shape of the installation opening	round	
mounting diameter	22.3 mm	
positive tolerance of installation diameter	0.4 mm	
mounting height	11.8 mm	
installation width	29.5 mm	
installation depth	24.4 mm	
Approvals Certificates		

Approvais Certificates

General Product Approval







Confirmation





Test Certificates

Marine / Shipping

Type Test Certificates/Test Report

Special Test Certificate









other

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1001-6AA50-0AA0

Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3SU1001-6AA50-0AA0}$


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1001-6AA50-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1001-6AA50-0AA0&lang=en

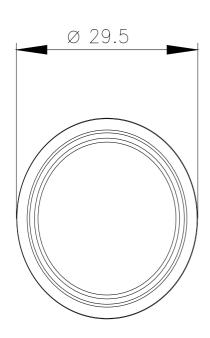

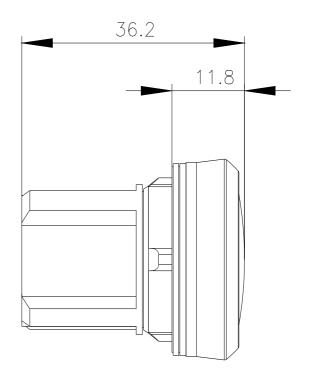

last modified: 11/4/2023 🖸