SIEMENS

Data sheet



EMERGENCY STOP mushroom pushbutton, 22 mm, round, plastic, red, 40 mm, with lock Siemens, lock no. SSP9, positive latching, according to DIN EN ISO 13850, key-operated release

product brand name	SIRIUS ACT
product designation	EMERGENCY STOP mushroom pushbuttons
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Plastic, black, 22 mm
Enclosure	
number of command points	1
Actuator	
design of the actuating element	positive latching
principle of operation of the actuating element	latching
product extension optional	
• light source	No
contact module	Yes
color	
of the actuating element	red
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	40 mm
type of unlocking device	Unlocking
number of switching positions	2
switch position for key distraction	0
lock make	CES
key number	SSP9
Front ring	
product component front ring	No
General technical data	
product function	
 positive opening 	Yes
 EMERGENCY OFF function 	Yes
EMERGENCY STOP function	Yes
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
 for railway applications according to EN 61373 	Category 1, Class B
vibration resistance	
• according to IEC 60068-2-6	10 500 Hz: 5g
 for railway applications according to EN 61373 	Category 1, Class B
operating frequency maximum	600 1/h
mechanical service life (operating cycles) typical	300 000

reference code according to IEC 81346-2	S	
Substance Prohibitance (Date)	10/01/2014	
Safety related data		
proportion of dangerous failures		
 with low demand rate according to SN 31920 	20 %	
 with high demand rate according to SN 31920 	20 %	
failure rate [FIT] with low demand rate according to SN 31920	100 FIT	
B10 value with high demand rate according to SN 31920	100 000	
EC 62061		
T1 value for proof test interval or service life according to IEC 61508	20 a	
mbient conditions		
ambient temperature		
during operation	-25 +70 °C	
during storage	-40 +80 °C	
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10) 95%)
nstallation/ mounting/ dimensions		
shape of the installation opening	round	
mounting diameter	22.3 mm	
positive tolerance of installation diameter	0.4 mm	
mounting height	84.5 mm	
installation width	40 mm	
installation depth	26.3 mm	
Approvals Certificates		
General Product Approval		Declaration of Con



General Product Approval

Confirmation









formity

Declaration of Conformity

Test Certificates

Marine / Shipping



Special Test Certificate

Type Test Certificates/Test Report







Marine / Shipping

other

Environment



Confirmation

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10


Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1000-1HS20-0AA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1000-1HS20-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3SU1000-1HS20-0AA0

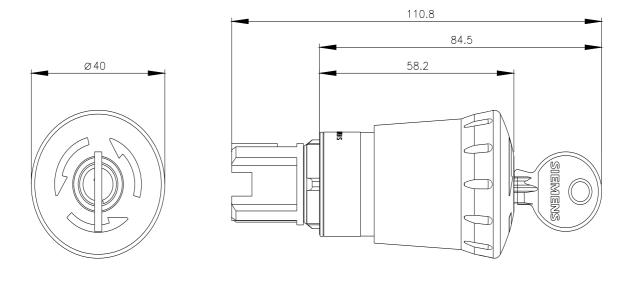

last modified: 1/27/2022 🖸