



# DRY Estanque LED 6300lm

**Tri-proof, 1.5m, 52W, IP65, IK08, 4000K, 6300lm, 121lm/-W, Non-dim,White**

**Model No.:**




**SGSO Sku:**

**0028920175**

**GTIN/EAN:**

**7630268415464**

Suitable for wall mounting:	Yes
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Lamp type:	LED not exchangeable
Housing material:	Plastic
Surface protection housing:	Untreated
Housing colour:	White
Material cover:	Plastic, opal
Voltage type:	AC
Nominal voltage:	220 ... 240 V
Nominal current:	230 mA
Type of control gear:	LED operating device current--controlled
No dim function	Yes
Light sharing:	Symmetric
Beam angle:	Open beam/diffuse
Colour consistency (McAdam ellipse):	SDCM4
Light outlet:	Direct
Energy efficiency class of the light source according to EU regulation 2019/2015:	D
Rated life time L70/B50 at 25 °C:	50000 h
Max. number of luminaires per miniature circuit breaker B16 (MCB):	36
Max. number of luminaires per miniature circuit breaker C16 (MCB):	62
Degree of protection (IP):	IP65
Impact strength:	IK08
Protection class:	I
Rated ambient temperature according to IEC 62722-2-1:	-20 ... 40 °C
Filament test according to IEC 60695-2-11:	850 °C - 30 s
Max. system power:	52 W
Luminaire efficacy:	121 lm/W
Rated luminous flux according to IEC 62722-2-1:	6300 lm
Colour of light:	White
Colour temperature:	4000 K
Flickering value Pst LM:	1
Colour rendering index CRI:	80-89
Power factor:	0.9
Stroboscope effect value SVM:	0.4
Width:	64 mm
Height/depth:	64 mm
Length:	1570 mm
Type of wiring:	Through wiring included
Conductor cross section:	0.75 mm <sup>2</sup>
Connection type:	Push-in clamp
Photobiological safety according to EN 62471:	RG0
Unified Glare Ratio (UGR):	28
Luminous intensity:	1557.1 cd

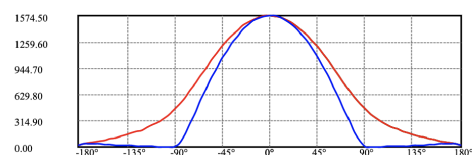

C0(Max):

C0/C180:

C90/C270:

Field angle(10%Imax):C0/180Left:131.5 Right:132.1

:C90/270Left:79.4 Right:80.9

Beam Angle(50%Imax):C0/180Left:68.6 Right:68.6

:C90/270Left:56.2 Right:57.6