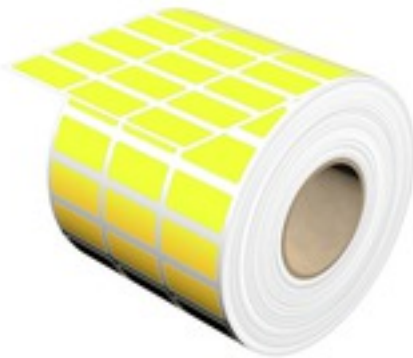


**THM MT30X 25/12 GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Similar to illustration

The THM labels offer brilliant printing quality thanks to the thermal transfer technology. Different materials and the user-friendly printing system under Windows optimise every marking effort.

- High-quality polyester labels in various colours or inexpensive paper labels are available
- Labels are automatically positioned in the printer for perfectly centred prints on each label.

**General ordering data**

|                    |                                                       |
|--------------------|-------------------------------------------------------|
| Version            | THM, Device markers, 12 x 25 mm, yellow               |
| Order No.          | <a href="#">1751751687</a>                            |
| Type               | THM MT30X 25/12 GE                                    |
| GTIN (EAN)         | 4032248001378                                         |
| Qty.               | 1 pc(s).                                              |
| compatible printer | <a href="#">2599430000</a> <a href="#">2599440000</a> |

## THM MT30X 25/12 GE

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 0.08 mm | Depth (inches)  | 0.003 inch |
| Height     | 12 mm   | Height (inches) | 0.472 inch |
| Width      | 25 mm   | Width (inches)  | 0.984 inch |
| Net weight | 599 g   |                 |            |

## Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -40...150 °C |
|-----------------------------|--------------|

## General data

|                                   |                               |                                   |                             |
|-----------------------------------|-------------------------------|-----------------------------------|-----------------------------|
| Adhesive                          | Acrylate                      | Colour                            | yellow                      |
| Halogen                           | No                            | Material                          | Polyester                   |
| Number of markers per combination | 1 Label reel = Device markers | Number per roll                   | 10,000                      |
| Operating temperature range       | -40...150 °C                  | Operating temperature range, max. | 150 °C                      |
| Operating temperature range, min. | -40 °C                        | Printing method                   | Thermal transfer            |
| UL 94 flammability rating         | V-0                           | Version                           | Self-adhesive, halogen-free |
| Width                             | 25 mm                         |                                   |                             |

## Device markers

|         |    |
|---------|----|
| Halogen | No |
|---------|----|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001288    | ETIM 7.0    | EC001288    |
| ETIM 8.0    | EC001288    | ECLASS 9.0  | 27-40-06-29 |
| ECLASS 9.1  | 27-40-06-29 | ECLASS 10.0 | 27-40-06-29 |
| ECLASS 11.0 | 27-28-11-04 |             |             |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">STEP</a>                     |
| Engineering Data | <a href="#">EPLAN, WSCAD</a>             |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |

**THM MT30X 25/12 GE**

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

